




aseke® COMMERCIAL CHAINS

PRODUCED ON GERMAN 'WAFIOS', FULLY AUTOMATIC CUTTING, BENDING AND WELDING MACHINES.
 PRODUCT CERTIFIED TO EN-10204 3.1 (CHEMICAL AND MECHANICAL PROPERTIES).
 THICK, SMOOTH, BUT EVEN SURFACE OF ZINK THROUGH TECHNOLOGICAL INNOVATION:
 CONTINUOUS HOT GALVANISATION.

SHORT LINK GRADE 40 NORWEGIAN STANDARD

ITEM-NO	t	l	b	CA		METERS PER BUNDLE
				KG/M	MBL	
922003	3,5 MM	18	14	0,26	4,8 kN	100
922005	5 MM	22	19	0,52	13,5 kN	100
922006	6,5 MM	24	23	0,88	25 kN	50
922008	8 MM	24	28	1,39	45 kN	50
922010	10 MM	32	34	2,17	68,5 kN	30
922011	11 MM	35	38	2,63	80 kN	30
922013	13 MM	39	44	3,85	114 kN	30
922016	16 MM	48	55	5,6	166 kN	30
922019	19 MM	57	64	8	243 kN	30
922022	22 MM	66	73,5	10,6	300 kN	30




NORWEGIAN STANDARD CHAIN LINK MEASUREMENTS ALLOWS BOTH THE BOW AND THE BOLT OF A CORRESPONDING SIZED SHACKLE TO FIT INTO ANY CHAIN LINK, NOT ONLY IN THE END LINKS OF A CHAIN LENGTH.

ELECTRO.GALVANIZED WEIGHT-CHAINS GRADE 30

	t	l	b		M PER DRUM	
922313	13 MM	39	45	3,75	-	130
922316	16 MM	45	55	5,56	-	90
922319	19 MM	57	64	7,78	-	60
922322	22 MM	62	73,5	10,68	-	50

LONG LINK GRADE 40 DIN 763/DIN 5685C

ITEM-NO	d	t	b	CA		METERS PER BUNDLE
				KG/M	MBL	
932003	3 MM	26	12	0,2	2,3 kN	100
932004	4 MM	32	16	0,3	4,8 kN	100
932005	5 MM	35	20	0,5	13,5 kN	100
932006	6 MM	42	24	0,7	24 kN	50
932008	8 MM	52	31	1,1	45 kN	50
932010	10 MM	65	38	1,8	68,5 kN	30/50
932011	11 MM	72	41	2,2	80 kN	30
932013	13 MM	82	50	3,0	114 kN	30
932016	16 MM	100	62	4,4	166 kN	30
932018	19 MM	125	75	6,6	243 kN	30

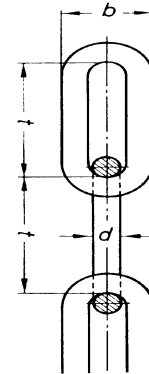

GALVANIZED MID-LINK GRADE 40 CHAINS COATED WITH BLUE TPU

ITEM-NO	d	t	b	CA		METER PER BOX
				KG/M	MBL	
922TPU55	5,5 MM	24,5	19,5	0,71	17,5 kN	300



CHAIN AND WIRE ROPE CUTTER

ITEM NO	LENGTH CM	KG PER PIECE	MAX DIA. CAPACITY
950029	90	0	8 MM DIA
950030	105	7,6	13 MM DIA

