



aseke® XS-100 SHHP ANCHORS

'SUPER HIGH HOLDING POWER', WELDED, BLACK BITUMINIZED, PRODUCT CERTIFIED TO NS 9415:2009 BY PRODUCT CERTIFICATE PR030. INDIVIDUALLY MARKED WITH ID-NUMBERS
SUITABLE FOR USE ON SEA BOTTOMS OF SAND, CLAY, PEBBELS AND MIXED STRUCTURES


ITEM NO	CA KG	TESTED HOLDING		PROOF LOAD kN	MBL kN	USD PER PIECE
		POWER TONS	SANDY BOTTOM			
906875	75	3,9		39	78	
906900	100	4,7		47,3	94,6	
9069XS	200	8		73,2	146,4	
906903	300	12		97,8	195,6	
906904	500	20		142,7	285,4	
90690X	600	24		165,7	331,4	Prices
906907	700	28		187,6	375,2	upon
906979	800	32		210,3	420,6	inquiry
906908	850	34		220,9	441,8	
906910	1000	40		251,8	503,6	
906912	1200	48		291,5	583,0	
906915	1500	60		348,3	696,6	
906918	1800	72		400,3	800,6	
906920	2000	80		433,6	867,2	
906925	2500	100		508,8	1017,6	
906930	3000	120		576	1152,0	



AC-14 ANCHORS

DESIGNED FOR USE ON ROCKY SEA BOTTOMS
FORGED, BLACK BITUMEN SURFACE, INCL ANCHOR SHACKLE
PRODUCT CERTIFIED TO NS 9415:2009 WITH CERTIFICATE NO PR030

ITEM NO	CA KG	CA. HEIGHT	CA. WIDTH	PROOF LOAD kN	MBL kN	USD PER PIECE
906704	428	1200 MM	1080 MM	130	163	
906706	675	1398 MM	1254 MM	181	228	
906707	750	1450 MM	1300 MM	198	248	
906708	910	1540 MM	1382 MM	235	295	
906709	970	1600 MM	1400 MM	247	310	Prices
906710	1080	1670 MM	1410 MM	267	335	upon
906713	1305	1700 MM	1560 MM	313	393	inquiry
906714	1440	1800 MM	1610 MM	340	425	
906717	1710	1900 MM	1690 MM	380	475	
906718	1845	1955 MM	1746 MM	406	510	
906721	2100	2030 MM	1811 MM	450	565	
906724	2475	2140 MM	1910 MM	503	629	
906728	2835	2280 MM	2000 MM	553	695	
906730	3000	2290 MM	2064 MM	575	719	

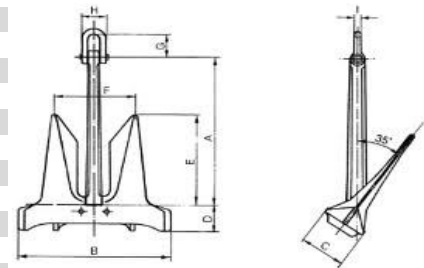

KLIPP ANCHORS

FORGED/WELDED, HOT DIP GALVANIZED

ITEM NO	CA KG	CA HEIGHT	CA WIDTH	BOAT SIZE	NOK PER PIECE
906425	25	615 MM	475 MM	25'-35'	
906430	30	615 MM	475 MM	28'-40'	
906435	35	645 MM	500 MM	30'-45'	Prices
906440	40	675 MM	525 MM	36'-50'	upon
906450	50	617 MM	537 MM	48'-65'	inquiry
906475	75 KG	707 MM	616 MM	60'-70'	
906110	100 KG	777 MM	678 MM	62'-80'	
906115	150 KG	890 MM	775 MM	65'-100'	
906120	200 KG	971 MM	847 MM	75'-125'	

