



aseke® STEEL WIRE ROPE CLIPS



HOT DIP GALVANIZED WITH 8.8 ALLOY ELECTRO GALVANIZED BOLTS AND NUTS.

THE aseke CLIPS IS A NEW CONSTRUCTION BASED ON OUR PREVIOUS DEKA WIRE ROPE CLIPS.

THE CONSTRUCTION OF THE aseke CLIPS PREVENTS WRONG MOUNTING WITH IMPROPERLY DISTRIBUTED FORCES TO THE STEEL WIRE ROPE.

THE aseke CLIPS ARE TESTED AND DOCUMENTED BY THE TECHNOLOGICAL INSTITUTE OF OSLO FOR USE IN LIFTING APPLICATIONS. THE REPORT WILL BE DISTRIBUTED UPON REQUEST.

ITEM NO	FOR WIRE ROPE DIA	l	b	h	HEIGHT OF FORGED PART
899006	5 - 6 MM	32 MM	30 MM	39 MM	21 MM
899008	6,5 - 8 MM	35 MM	32 MM	44 MM	24 MM
899010	8,5 - 10 MM	40 MM	38 MM	50 MM	25 MM
899012	10,5 - 12 MM	45 MM	43 MM	57 MM	32 MM
899016	12,5 - 16 MM	56 MM	59 MM	78 MM	37 MM
899020	16,5 - 20 MM	61 MM	56 MM	89 MM	48 MM
899025	21 - 26 MM	74 MM	67 MM	100 MM	52 MM
899035	26,5 - 36 MM	98 MM	86 MM	138 MM	74 MM

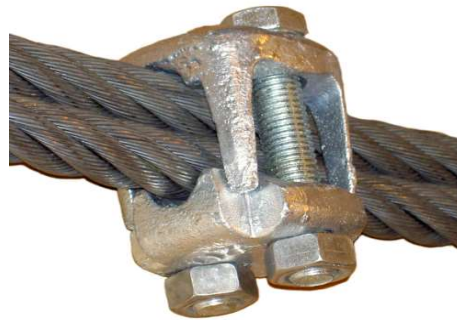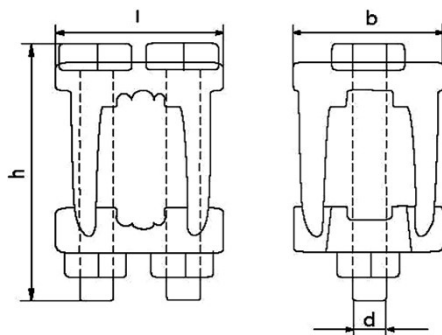

INSTALLATION MANUAL				
ITEM NO	8.8 BOLT d	NUMBER OF CLIPS	TORQUE MOMENTUM Mn	PACK UNIT
899006	M 6	3	9	50
899008	M 6	3	14	50
899010	M 8	3	23	25
899012	M 10	3	35	20
899016	M 12	3	55	10
899020	M 14	4	75	5
899025	M 16	4	195	5
899035	M 20	5	195	6

THE BOLTS/NUTS ARE TO BE TIGHTENED ALTERNATELY ACC TO THE TABLE ABOVE.

NOTE! THE NUTS MUST BE TIGHTENED IN INTERVALS PRIOR TO THE USE OF THE CLIPPED STEEL WIRE ROPE.

