




aseke® CHAINS GRADE 80

SHORT LINK LIFTING CHAINS ACC TO EN 818-2

PRODUCED ON GERMAN 'WAFIOS' FULLY AUTOMATIC CUTTING, BENDING AND WELDING MACHINES.
CERTIFIED TO EN-10204 3.1 (CHEMICAL AND MECHANICAL PROPERTIES)

BLACK ELECTROPHORETIC LAQUERED SURFACE


ITEM NO	t	l	b	CA KG/M	BREAKING	TEST	WLL	METER PER DRUM
					FORCE kN	LOAD kN	TONS 1:4	
921006	6 MM	18	20,7	0,80	45,2	28,3	1,12	650
921007	7 MM	21,5	24,5	1,08	61,6	38,5	1,5	500
921008	8 MM	24	27,5	1,38	80,4	50,3	2	400
921010	10 MM	30	34,5	2,22	126	78,5	3,15	250
921013	13 MM	39	45	3,73	212	133	5,3	150
921016	16 MM	48	55,5	5,85	322	201	8	90
921019	19 MM	57	64	7,83	454	284	11,2	75
921020	20 MM	60	68	8,64	503	314	13	50
921022	22 MM	66	73,5	10,40	608	380	15	50
921026	26 MM	78	89	14,80	849	531	21,2	35
921032	32 MM	96	112	22,36	1290	804	31,5	22/25



LONG LINK ACC TO DIN 763/DIN 5685C

CERTIFIED TO EN-10204 3.1 (CHEMICAL AND MECHANICAL PROPERTIES)

ITEM NO	t	l	b	CA KG/M	MBL kN	TEST	METER
						LOAD kN	PER DRUM/PALLET
921309	9 MM	59	36	1,5	102	51	350/750
921311	11 MM	72	41	2,3	152	76	240/ -
921313	13 MM	80	50	3,1	212	107	150/ -
921316	16 MM	100	62	4,5	322	161	100/ -
921319	19 MM	100	66	6,5	454	227	75/160
921322	22 MM	127	82	8,7	610	305	50/ -
921328	28 MM	153	94	13,5	980	490	30/ -
921332	32 MM	171	108	17,8	1288	644	20/50

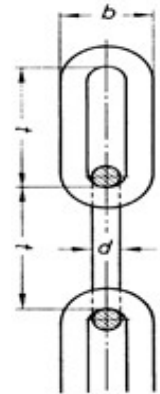

CHAIN AND WIRE ROPE CUTTER

ITEM NO	WIDTH CM	LENGTH CM	MAX DIA. CAPACITY
950030	16	90	13 MM DIA



NEUTRAL OCTAGONAL ALU ID-TAGS FOR GRADE 80

FOR CERTIFIED CHAIN LIFTING APPLICATIONS

ITEM NO	TYPE	NUMBER PER BAG
M6	SINGLE PART	10
M7	MULTI PART	10
M3	LOCKING WIRE	10

