




SIDE 6 (Produktgruppe G80/100 KJETTING)

aseke® KJETTING GRADE 80

KORTLENKET LØFTEKJETTING ifølge EN 818-2

PRODUSERT PÅ TYSKE 'WAFIOS', HELAUTOMATISKE KAPPE, BØYE OG SVEISE MASKINER
LEVERES MED SERTIFIKAT EN-10204 3.1 (KJEMISKE OG MEKANISKE VERDIER)
SORT ELEKTROFØRETISK LAKKERT OVERFLATE:

VARE-NR	t	l	b	CA KG/M	BF kN	TEST LAST kN	WLL TONN 1:4	METER PER FAT
921006	6 MM	18	20,7	0,80	45,2	28,3	1,12	650
921007	7 MM	21,5	24,5	1,08	61,6	38,5	1,5	500
921008	8 MM	24	27,5	1,38	80,4	50,3	2	400
921010	10 MM	30	34,5	2,22	126	78,5	3,15	250
921013	13 MM	39	45	3,73	212	133	5,3	150
921016	16 MM	48	55,5	5,85	322	201	8	90
921019	19 MM	57	64	7,83	454	284	11,2	75
921020	20 MM	60	68	8,64	503	314	12,5	50
921022	22 MM	66	73,5	10,40	608	380	15	50
921026	26 MM	78	89	14,80	849	531	21,2	35
921032	32 MM	96	112	22,36	1290	804	31,5	22/25




LANGLENKET ifølge DIN 763/DIN 5685C

NATURSOORT OVERFLATE, UBEHANDLET

LEVERES MED SERTIFIKAT EN-10204 3.1 (KJEMISKE OG MEKANISKE VERDIER)

VARE-NR	t	l	b	CA KG/M	MBL kN	TEST LAST kN	METER PER FAT/PALLEBUR
921309	9 MM	59	36	1,48	102	51	350/750
921311	11 MM	72	41	2,25	152	76	240/ -
921313	13 MM	80	50	3,06	212	107	150/ -
921316	16 MM	100	62	4,51	322	161	100/ -
921319	19 MM	100	66	6,49	454	227	75/160
921322	22 MM	127	82	8,75	610	305	50/ -
921328	28 MM	153	94	13,53	980	490	30/ -
921332	32 MM	171	108	17,81	1288	644	20/50

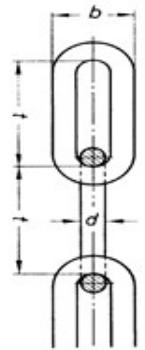

KJETTING- OG WIRE SAKS

VARE NR	BREDDE CM	LENGDE CM	MAX DIM. KAPASITET
950030	16	90	13 MM DIA



NØYTRALE 8-KANTET ALU.ID-MERKESKILT FOR GRADE 80

FOR SERTIFISERTE KJETTING LØFTE REDSKAPER

VARE NR	TYPE	ANTALL PER POSE
M6	EN-PART	10
M7	FLER-PART	10
M3	LÅSE WIRE	10

