


**aseke® TRÅL KJETTING GRADE 80**


PRODUSERT PÅ TYSKE 'WAFIOS', HELAUTOMATISKE KAPPE, BØYE OG SVEISE MASKINER
LEVERES MED SERTIFIKAT EN-10204 3.1 (KJEMISKE OG MEKANISKE VERDIER)

**KORTLENKET (DIN 766), SORT ELEKTROFORETISK OVERFLATEBEHANDLET
KAN BENYTTES TIL BÅDE TRÅLING OG LØFT**

VARE-NR	t	l	b	CA KG/M	MBL kN	TESTLAST kN	METER PER FAT
921006 NY	6 MM	18	20,7	0,80	45,2	28,3	650
921007 NY	7 MM	22	24,5	1,08	61,6	38,5	500
921008 NY	8 MM	24	27,5	1,38	80,4	50,3	400
921010 NY	10 MM	30	34,5	2,22	126,0	78,5	250
921013 NY	13 MM	39	45,0	3,73	212,0	133,0	150
921016 NY	16 MM	48	55,5	5,85	322,0	201,0	90
921019 NY	19 MM	57	64,0	7,83	454,0	284,0	75
921020 NY	20 MM	60	68,0	8,64	503,0	314,0	50
921022 NY	22 MM	66	73,5	10,40	608,0	380,0	50
921026 NY	26 MM	78	89,0	14,80	849,0	531,0	35
921032 NY	32 MM	96	112,0	22,36	1 290,0	804,0	22/25

**MID LINK, NATURSORT OVERFLATE
IKKE FOR LØFT**

VARE-NR	t	l	b	CA KG/M	MBL kN	TESTLAST kN	METER PER FAT
921110	10 MM	40	34,5	1,97	126	63	250
921111	11 MM	63	42	2,25	152	76	240
921113	13 MM	52	46	3,52	212	107	150
921116	16 MM	64	56	5,09	322	161	100
921119	19 MM	76	66	7,14	1284	227	75
921122	22 MM	88	75	9,70	610	305	50
921126	26 MM	104	90	13,71	850	425	50*
921132	32 MM	128	115	20,02	1284	578	35*

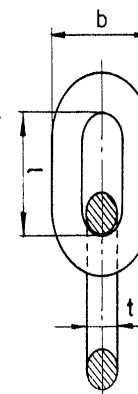

* = i Palle bur

**LANGLENKET (DIN 763/DIN 5685C), NATURSORT OVERFLATE
IKKE FOR LØFT**

VARE-NR	t	l	b	CA KG/M	MBL kN	TESTLAST KG	METER PER FAT/PALLEBUR
921309	9 MM	59	36	1,48	102	51	350/750
921311	11 MM	72	41	2,25	152	76	240/ -
921313	13 MM	80	50	3,06	212	107	150/ -
921316	16 MM	100	62	4,51	322	161	100/ -
921319	19 MM	100	66	6,49	454	227	75/160
921322	22 MM	127	82	8,75	610	305	50/ -
921328	28 MM	153	94	13,53	980	490	30/ -
921332	32 MM	171	108	17,81	1288	644	22/50

